Flier pdf






## High speed hand dryer

Code 1192: Hands free hand dryer, high speed, 120 volts,

porcelain white finish.

Code 1193: Hands free hand dryer, high speed, 120 volts, satin

stainless steel finish.

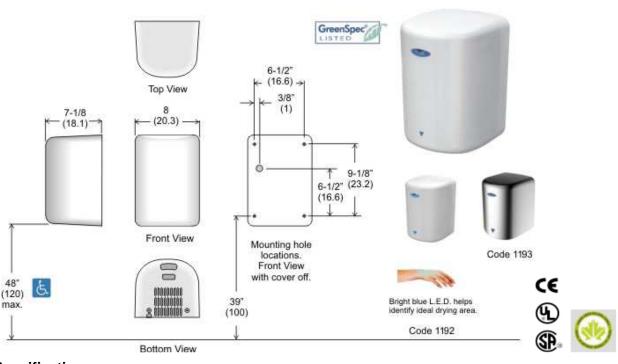

## **Specifications:**

**Site Location:** Ideal for areas with limited space requirements and installations promoting power conservation.

**LEED Credits:** Minimum energy performance: design and construction, EA prerequisite 2 Optimized energy performance: design and construction, EA Credit 1

**Features:** Blue L.E.D. Helps target ideal drying area. Drying time: 10-12 seconds. Outer casing is 16 ga. drawn steel with porcelain enameled finish. Stainless steel: 16 ga. Whole unit is rated at 1600 watts. Heating element is 900 watts. Dual ball bearings brush motor is 700W, 18000 R.P.M. The decibel reading at 1 meter is 78.

Operating Voltage: 110-120 Vac, 50/60Hz, 1.3 - 1.6 kw. Amps drawn: 14.5

**Electrical Safety:** Motor thermal protection: contains an auto resetting thermostat which turns the unit off at 105°C (221°F). Motor overload pro tection: motor assembly has a replaceable fuse.

Heater thermal protection: An auto resetting thermostat turns the unit off at 85°C (185°F).

Drip proof: IP X1; Isolation: Class 1.

Performance: Air speed output: 100 m/s (225 mi/hr). Sensor range: 7" (18cm).

Warranty: Complete 5 years from date of purchase.

**Maintenance**, **Exterior**: Unit may be cleaned with soap and water or approved cleaning products/sanitizers. **Interior**: Motor assembly and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce

performance and result in void of warranty.

Shipping Weight: 6.6ks (14.6 lbs)

**Installation:** Supplied with mounting template, instructions, screws and anchors.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.