




Touch Free Soap Dispenser

Code 714P:Heavy duty plastic moulded cover.Code 714S:Stainless steel, 304 no. 4 finish.

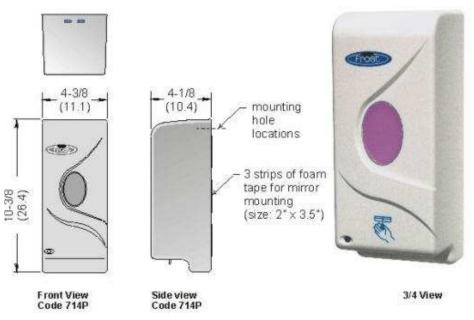

Specifications:

Site Location: Ideal for high traffic areas and multiple mirror mounting.

Features: Soap is dispensed when hand is placed within 2-1/4" (6cm) under the unit. Unit is powered by 3 "c" alkaline batteries (not included). Battery life is 10,000 cycles. or one year. Low battery indicator (flashes red). Soap viscosity range: 2,000 - 5,000 cps, (covers most liquid soap products).

Shipping Weight: 2 lbs., (bulk packed 12 units per case)

Capacity: 1 litre. (33 ounces)

Installation: For unrestricted access, bottom of unit to floor should not exceed 44" (111.7). Insure unit is mounted 20 cm above any horizontal surface (30 cm for stainless steel). Prior to mounting using self adhesive: clean glass surface, mark clearly with removable marker or masking tape the exact location and plumb line for unit. The foam tape backing on the dispenser does not allow for repositioning of unit if it is mounted crooked or askew. Allow tape to set ten hours prior to filling dispenser with soap and loading batteries.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.