


SPRAYWAY'S BLACK LABEL SERIES PRODUCT TECHNICAL DATA SHEET

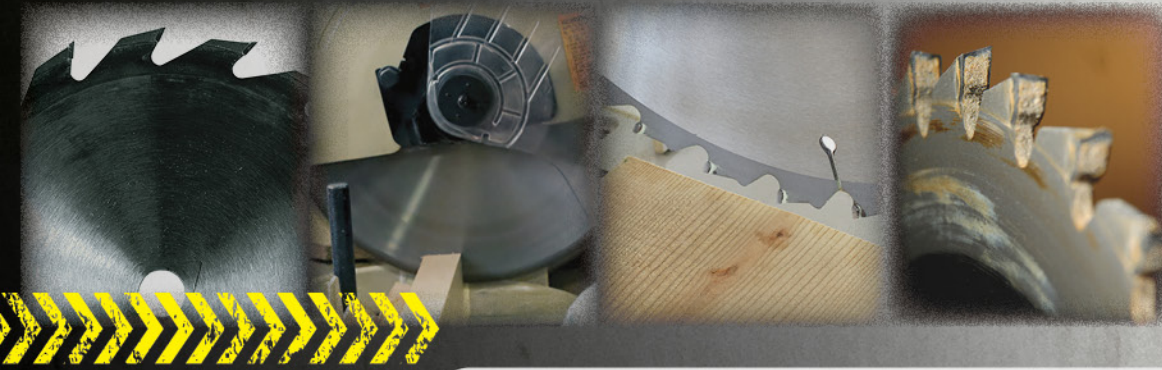

MADE IN THE
USA

SP295 T¹ TFE DRY COATING LUBRICANT AND RELEASE AGENT

This non-oily, non-staining woodworker's lubricant remains dry during use. Extremely slick, T1 will not melt below 500°F, will not attract or hold dust or dirt and will not become gummy. Repels oil and water. Reduces friction. Inhibits resin build-up while it prolongs tool life.

- REPELS OIL & WATER
- FORTIFIED WITH TFE
- REDUCES FRICTION - STOPS STICKING
- PROLONGS TOOL LIFE
- PAINTABLE - WILL NOT AFFECT WOOD FINISH

USES:

- Dry coating lubricant for use on: saw blades, planers, router bits, drill bits, shapers, table tops. Use as a release agent for rubber, epoxy, phenolic, polyester and other resins.

PRODUCT SPECIFICATIONS

- Can Size: 20 oz.
- Net Weight: 12 oz.
- Shipping Weight: 14 lb.
- Packaged: 12 cans per case
- UPC Number: 0 41911 00295 0
- Color: Tan
- Fragrance: None
- Shelf Life: 1 Year +
- Ozone Depleting Compounds: None
- Recyclable Packaging: Yes
- VOC Compliant CARB/OTC: Yes
- Flammability: Extremely flammable
- 24 HOUR MEDICAL EMERGENCY: 1-866-836-8855

WHMIS labeled for sale in Canada

To obtain MSDS sheets for products please visit

www.spraywayblack.com

or call customer service 800.332.9000



1005 S. Westgate Drive | Addison, IL 60101

fx: 630.543.7797